

Pure Sine Wave Inverters



DC to AC Inverters
150 W / 300 W / 600 W

- Premium pure sine inverters!
- For RVs, boats, cars and trucks
- Innovative, compact design
- Use with DC Install Kits

Pure Sine Wave Power!

Go Power!™ Pure Sine Wave Inverters are the ultimate choice for appliances that demand a clean, pure source of AC power. With sine wave power, your audio, video and electronic equipment will run without buzzing or humming, and motors and appliances like microwaves run more efficiently.

Ideal for:

Consumer Electronics

TVs, VCRs, stereos, lighting, fans, video game systems, DVDs, and satellite dishes.

Office Equipment


Computers, printers, fax machines, and monitors.

Use anywhere including:

- RVs and Campers
- Boats
- Mobile Service
- Long Haul Trucks
- Mobile Electronics
- Utility Trucks



The Go Power!™ and SW600 W In above (from left to right)

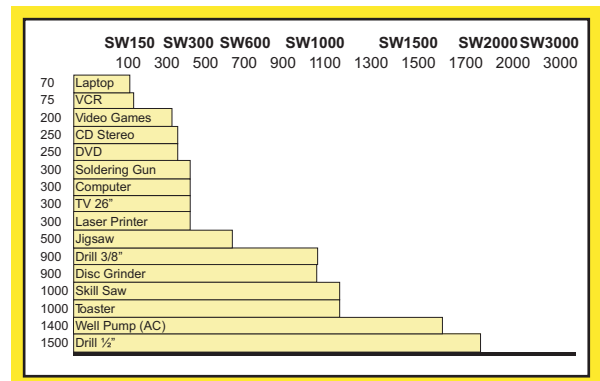

Specifications*	GP-SW150		GP-SW300		GP-SW600	
	12 V	24 V	12 V	24 V	12 V	24 V
Continuous Output Power	150 W		300 W		600 W	
Surge Rating	260 W		450 W		860 W	
Output Waveform	Sine Wave <3% THD		Sine Wave <3% THD		Sine Wave <3% THD	
Output Voltage ± 3%	115 VAC RMS		115 VAC RMS		115 VAC RMS	
Output Frequency ± 0.05%	50 / 60 Hz adjustable		50 / 60 Hz adjustable		50 / 60 Hz adjustable	
Input Voltage	10.5-15 VDC	21.0-30.0 VDC	10.5-15 VDC	21.0-30.0 VDC	10.5-15 VDC	21.0-30.0 VDC
Efficiency	80-90%		80 - 90%		85-92%	
No Load Current Draw	0.20 A	0.15 A	0.26 A	0.23 A	0.90 A	0.50 A
Protection	Overload, Short Circuit, Reverse Polarity (Fuse), Over/Under Voltage, Over Temperature					
Low Battery Alarm ± 2%	10.5 V	21.0 V	10.5 V	21.0 V	10.5 V	21.0 V
Low Battery Shut-Down ± 2%	10.0 V	20.0 V	10.0 V	20.0 V	10.0 V	20.0 V
Operating Temperature Range	0 - 40°C / 32°F - 104°F		0 - 40°C / 32°F - 104°F		0 - 40°C / 32°F - 104°F	
Storage Temperature Range	-30°C - 70°C / -22°F - 158°F		-30°C - 70°C / -22°F - 158°F		-30°C - 70°C / -22°F - 158°F	
Cooling	Thermostatically Controlled Fan		Thermostatically Controlled Fan		Thermostatically Controlled Fan	
AC Receptacle	Dual Receptical		Dual Receptical		Dual GFCI	
Dimensions (LxWxH) mm	200 x 132 x 72		237 x 155 x 72		295 x 180 x 72	
inches	8 x 5.3 x 2.9		9.3 x 6.1 x 2.8		11.6 x 7.1 x 2.8	
Weight kg / lbs	2.7 / 5.9		3.5 / 7.7		2.7 / 5.9	
Warranty	2 Years		2 Years		2 Years	
Inverter Install Kit	Auto Utility Adapter	Battery Ring Terminal Connection	Battery Ring Terminal Connection		GP-DC-Kit 2	
UPC	8-39085-00057-1	8-39085-00135-6	8-39085-00004-5	8-39085-00060-1	8-39085-00007-6	8-39085-00018-2

*Specifications subject to change without notice



Carmanah®
www.carmanah.com

the POWER to GO anywhere!

In US contact: 866-247-6527 In Canada contact: 800-667-6527 Toll Free Fax: 866-607-6527
sales@gpelectric.com www.gpelectric.com

